

## ATX<sup>4-8</sup>



## Overview

---

- 4x12 matched impedance curve
- ATX4 supports 2Ω-4Ω-8Ω amplifiers
- ATX8 supports 4Ω-8Ω-16Ω amplifiers
- Speaker impedance  $\geq$
- Power handling 100W


## Features

- Continuous level control
- Full reactivity at all levels
- Line Out
- Compact, fits on the side of common 50W-100W amplifiers
- Passive Circuit

## Safety

- Automatic load mode (disconnect speaker cable)
- Do not block venting holes
- Do not switch under power

*100W amps can produce 150W or more so in that case use position 1 or 3 as they handle more power. Modern amps such as JVM410 shape their sound mainly in the preamp and therefore does not require the power amp to be hard driven.*

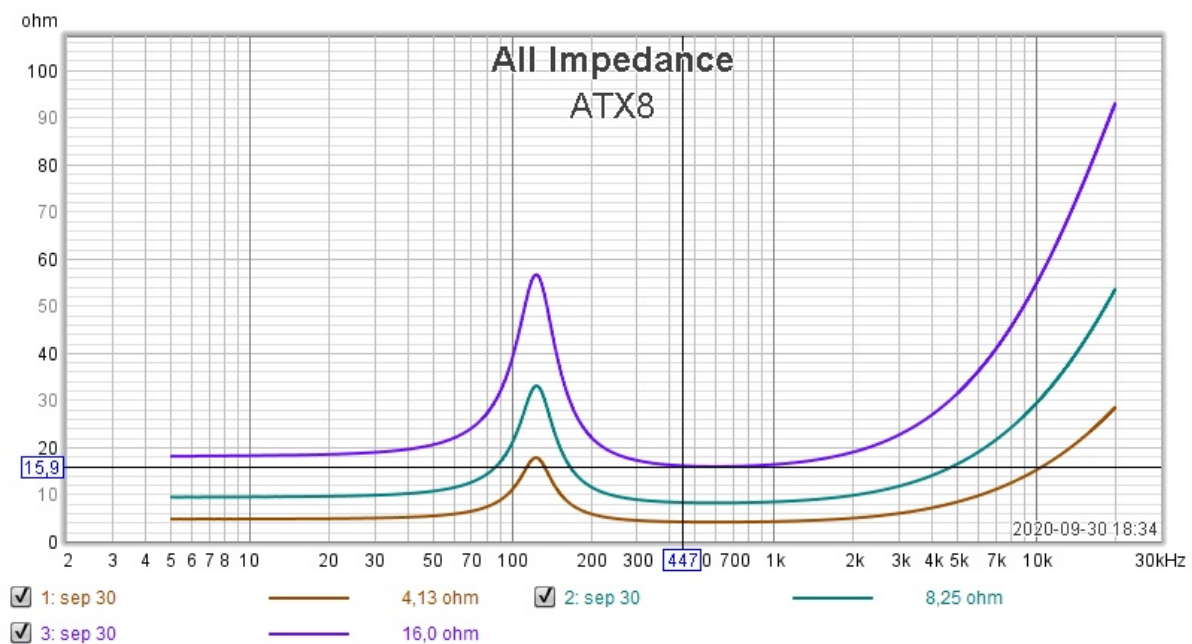

### Impedance

1: 4Ω      2: 8Ω      3: 16Ω

## Specifications

---

IMPEDANCE	LINE OUT	CONTROLS	POWER HANDLING
2Ω-4Ω-8Ω-16Ω	500Ω	RHEOSTAT	100W

WIDHT	DEPHT	HEIGHT	WEIGHT
6.5 in	8.3 in	3 in	4.4 lbs

2 year limited warranty. Warranty applies to defective material and workmanship for the original purchaser when bought from MASTERPLANT or authorised dealer. Opening the unit will void the limited warranty and any required service or update must be performed by MASTERPLANT. A copy of the original receipt must be included with the unit. Warranty will not cover damage caused by misuse or accidents. It will not cover any damage inflicted to other equipment resulting from impedance mismatch or any other faulty use.